



## User Manual v1.5

- 1409-2
- 1409-3
- NAV-LC2-xx
- NAV-LC3-xx

# Contents

Mode Change & Operation	3
Activation & Deactivation of Caravan Camera	4
Activation & Deactivation of Picture In Picture (PIP)	4
How to Turn Off Factory Navigation Commands	5
How to Calibrate the Factory Navigation	5
How to turn off Factory Beeps	5
Switching Navigation Sources	6
Premium Navigation & Hema Instructional Videos	6



# Mode Change and Operation

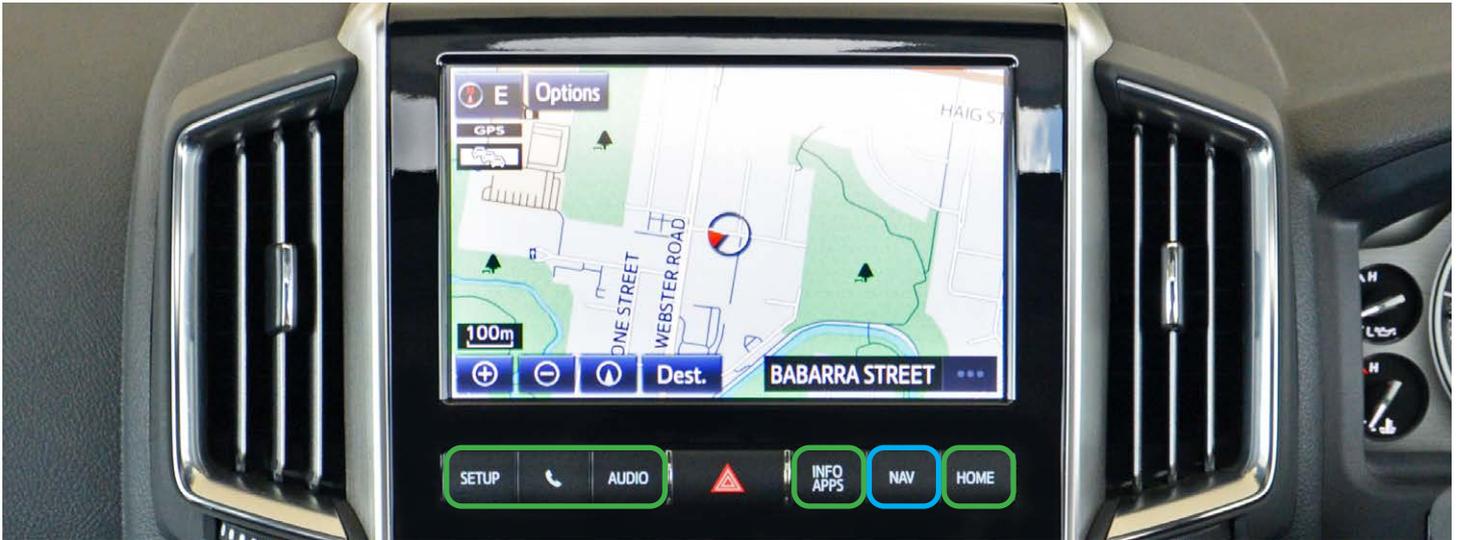


Figure 1

## Activation of video sources:

- Long press to activate video sources
- Return to OEM Display

## Picture In Picture (PIP) mode:

- Activation: Long Press of Hang Up button on SWC
- Deactivation: Long Press of Hang Up button on SWC

## Other Steering Wheel Control buttons:

- Phone Answer button: Returns to OEM Phone Screen
- Voice Control button: Returns to OEM Voice Screen

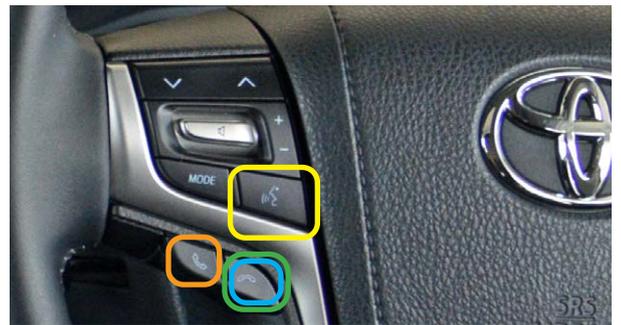


Figure 2

## Climate Control Buttons

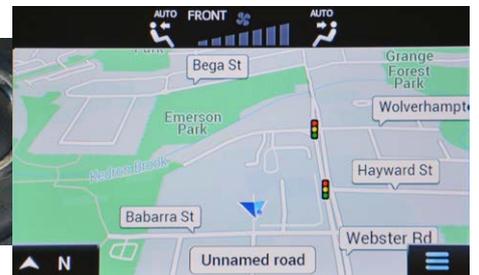


Figure 3

Some of the Climate buttons will show on the drop down when on the AV1 or Navigation sources. These are as indicated below:

- Buttons that will drop down
- Buttons that will not drop down
- To access the Climate Menu from the AV1 or NAVI, return to the factory screen (using the OEM buttons as shown in Figure 1). E.g. press *Home*, and once on the factory screen, press *Climate* and the screen will appear (Figure 4).



Figure 4

## Activation/Deactivation of Caravan Camera in Reverse

### To Activate the Caravan Camera:

- Turn the car on and wait for the system to boot up.
- Put the vehicle in Reverse gear. The system should default to the factory Reverse Camera.
- While in Reverse, long press the NAV button for 4 seconds.

### To Deactivate the Caravan Camera:

- Turn the car on and wait for the system to boot up.
- Put the vehicle in Reverse gear. The system should display the Caravan Camera.
- While in Reverse, long press the NAV button for 4 seconds. This will automatically change back to the Navigation Screen.
- Take the vehicle out of reverse gear, e.g. put in Park. The system should now default back to the reverse camera.

Watch a video of how to activate/deactivate:



### \*\*\*FOR ALL VEHICLES WITH 360 DEGREE CAMERA\*\*\*

When using the RTC Function (Caravan Camera Override of the vehicle's factory reverse camera), it is important to first deactivate any of the vehicle's factory cameras that are set to **AUTO**.

If one or more of the camera views are set to **AUTO**, this will result in strange camera functionality when moving through the gears.

To deactivate the **AUTO** function, you can press the **VIEW** button (Figure 5) behind the left side of the steering wheel. Ensure that the **AUTO** icon at the bottom right of the touch screen on both camera screens is off as shown (Figure 6).



Fig. 5



Fig. 6

## Activation/Deactivation of PIP mode for Caravan Camera

### Activation of PIP for single Caravan Camera (AV1 only):

- Activation: Long Press of Hang Up button on SWC
- Deactivation: Long Press of Hang Up button on SWC



Figure 7

### Activation of PIP for dual Camera setup (AV1 & AV2):

- 1st Long Press of Hang Up button on SWC:  
Activates AV1
- 2nd Long Press of Hang Up button on SWC:  
Activates AV2
- 3rd Long Press of Hang Up button on SWC:  
Deactivates PIP mode.



Figure 8


## How to Turn Off Factory Navigation Commands

Please note: If Hema only navigation is being installed, they will not require this setting to be changed.



### Step 1:

Access the *Setup* menu and select the *Voice* option on page 1 of the menu.

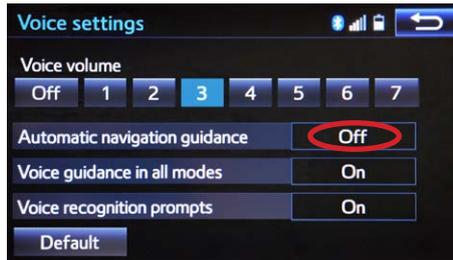


### Step 2:

Click to turn OFF *Automatic Navigation Guidance*.




### Step 3:

Go back to the *Setup* menu and select the *Navigation* option on page 2 of the Setup menu.

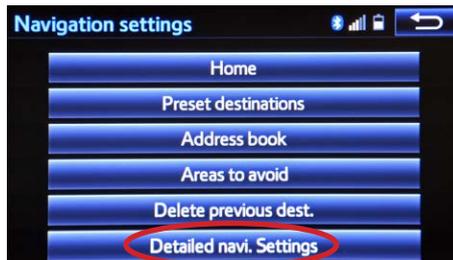

### Step 4:

Select the *Detailed navi. Settings* option of the *Navigation Settings* page.

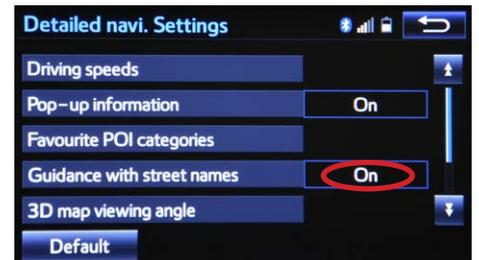

### Step 5:


At the top of the *Detailed navi. Settings* menu, you will see the *Guidance with street names* setting. Click to turn OFF.

## How to Calibrate the Factory Navigation




### Step 1:

Access the *Setup* menu and select the *Navigation* option on page 2 of the Setup menu.

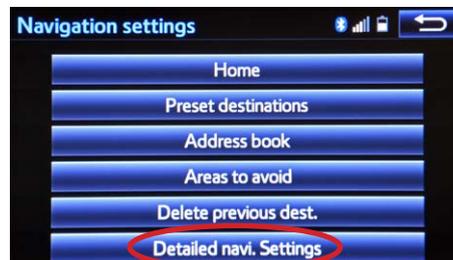

### Step 2:

Select the *Detailed navi. Settings* option of the *Navigation Settings* page.

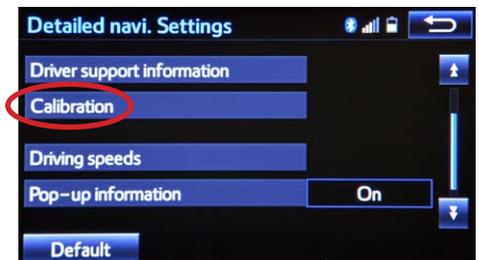


### Step 3:

Towards the bottom of the *Detailed navi. Settings* menu, click on the *Calibration* option to calibrate device.


## How to Turn ON/OFF Factory Beeps

Please note: This setting is for vehicles with the optional 1385 Navigation Override module installed.

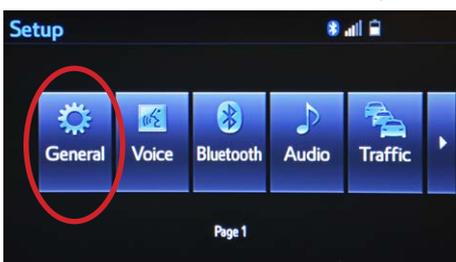

### Step 1:

Access the *Setup* menu and select the *General* option on page 1 of the Setup menu.

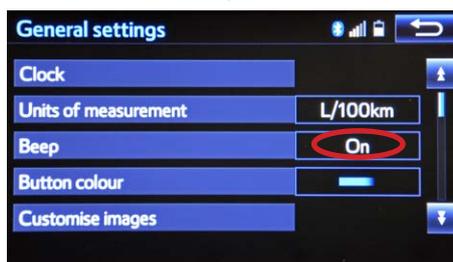

### Step 2:

There you will see the *Beep* setting. Click to the right to change from ON/OFF.

## How to Switch Navigation Sources

### How to access Hema 4WD Nav:



#### Step 1:

The first time you activate the system it will boot to the street nav as default. To switch to Hema, click on the Menu icon.



#### Step 2:


Select the *Exit* button at the top left of the screen.



#### Step 3:

This will open the *Navigation Selection Screen*. You now have 5 seconds to select *4WD Nav*, otherwise it will automatically reboot back to Street Nav. Once selected, Hema 4WD Nav will now begin to load on your screen.

### How to return to Street Nav:

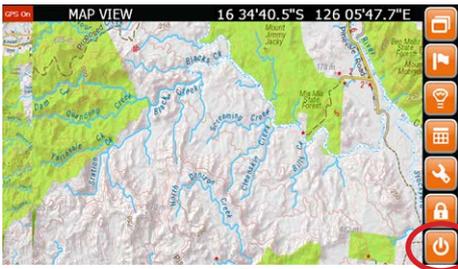

#### Step 1:

Press the *Exit* button in the bottom right of the Hema Menu



#### Step 2:

This will open the *Navigation Selection Screen*. You now have 5 seconds to select *Street*, otherwise it will automatically reboot back to Street Nav. Once selected, Street Nav will now begin to load on your screen.

## Navigation Instructional Videos

### Premium Street Navigation:

We have many videos on how to use our Premium Street Navigation System. Use the link to visit our YouTube Channel and learn more about how to use our Navigation.



### Hema 4WD Nav:

There are many videos on how to use and customise your Hema 4WD Nav. Use the link to visit Hema's Knowledgebase and view Video Tutorials.

